

## level measurement

### level switch NGS 150

#### features

- level switch for fluid types
- aseptic measuring point by process connection thread G 1/2" for modulare welded sleeve- and process connection system
- EHEDG-conform, food safe material
- **starting and adjustment by PC not necessary**
- definated position of screwing


#### technical specifications

- connection head made of stainless steel 1.4305
- food tangent sensor made of PEEK
- process connection G1/2" modulare system
- electrical connection with screwing or optional M12-plug
- protection class IP69K
- auxiliary supply 12...35VDC
- output signal active, max 50mA, short-circuit proof
- switching function full/empty by polarity of auxiliary supply
- temperature range 0...140°C process temperature for 30min
- high temperature design with neck tube optional
- temperature range connection head -20°C to +80°C
- max. operating pressure 10bar
- optional with switching status LED
- optional with neck tube for assembly in isolated cases or the like



NGS150-5-A-1


**We make it „robust“!!  
sealed electronic**




#### application areas

- fill level detection in cases and pipelines
- dry running condition protection
- empty-/full announcement

#### full announcement

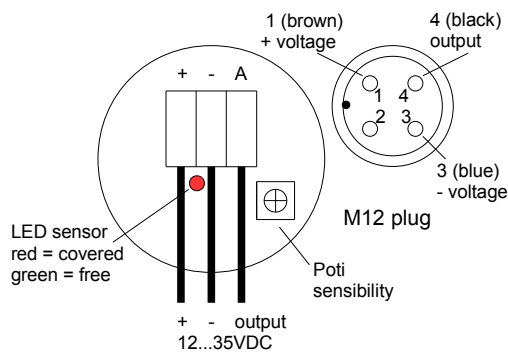

#### empty announcement

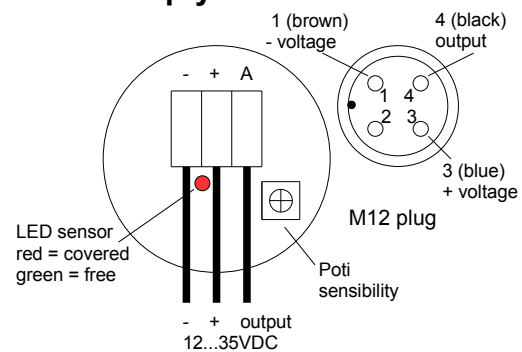

order-code NGS 150...

order example: NGS150-5-A-1

#### connection heads

- 5 stainless steel head standard with screwing
- 6 stainless steel head standard with M12-plug

#### design

- A standard design
- B standard design with neck tube for high temperature demand
- C extended design for switchpoint with distance (attention, use extra sleeve for assembly)

#### optional

- 1 standard design
- 2 with extern switching status LED