

## flow measurement

### flow switch CFS 200

#### features

- calorimetric flow switch
- innovative and compact design
- measurement of different liquids in various industries
- different process connections via adapter system possible
- high accuracy and reproducibility
- very easy to use with the help of 2 buttons and LED bar
- excellent readability and recognition from a distance by colored LEDs

#### technical specifications

power supply	24V DC with reverse polarity protection, +/- 10%
power	1,5...4VA
electronic design	compact device
connection head	stainless steel with/without inspection window
sensor material	stainless steel 1.4404/316L
process connections	compression fitting see accessories or flow adapter
electr. connections	M12-connector 4-pin
measuring range	4...400cm/s
accuracy	+/- 2...8cm/s
hysteresis	+/- 2...8cm/s
response time	1...6s, based on water 25°C
output	4...20mA and 1 switching output PNP
display	10 x 3-color LEDs
operation	2 x button
medium temperature	-10...+80°C (functional area)
ambient temperature	-20...+55 °C (housing and electronics)
pressure resistance	max. 100 bar (only the device, please observe the process connection)
protection class	protection class IP67
weight	290g




CFS 200-61-C-1-A

#### application areas

- water and wastewater industry,
- agriculture, biogas plants
- food industry dairies, breweries, pharmaceutical industry
- industrial applications such as heating circuits, cooling circuits
- power plant technology

#### product benefits

#### technical drawing

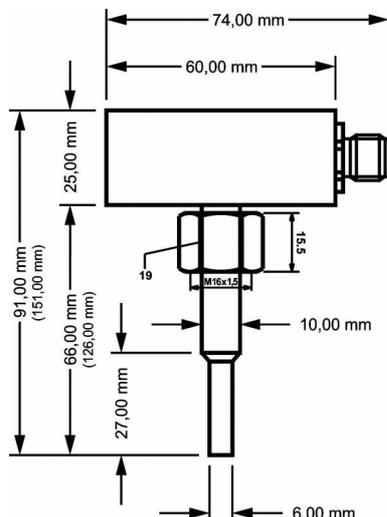

## flow measurement

order-code CFS 200...

order-example: CFS 200-61-C-1-A

### connection heads

-61 stainless steel head compact design with M12 connector

### inspection window

-C with LEDs in the connection head (version -61)

### sensor length without process connection

-1 length 65mm  
-2 length 125mm

### output

-A output 4...20mA and switching output PNP

### process adoption

-0 without a process connection (only hasp for clamp connection)  
-1/2" with 1/2" clamp connection  
-1/4" with 1/4" clamp connection

### accessories CFS 100... and CFS 200...

CFS adapter block DN20/G <sup>3</sup> / <sub>4</sub> " for 1 ... 10 l/min.	(dimensions 150×50×40 mm)
CFS adapter block DN15/G <sup>1</sup> / <sub>2</sub> " for 0.5 ... 5 l/min.	(dimensions 150×50×30 mm)
CFS adapter block DN10/G <sup>1</sup> / <sub>4</sub> " for 0.2 ... 2 l/min.	(dimensions 150×50×30 mm)
CFS adapter block DN4,7/G <sup>1</sup> / <sub>4</sub> " for 50 ... 500 ml/min.	(dimensions 70×50×30 mm)
CFS adapter block DN2,7/G <sup>1</sup> / <sub>4</sub> " for 2 ... 100 ml/min.	(dimensions 70×50×30 mm)